


## Hot line proximity alarm [Upper arm fitting type]

# HXA-6 type



Auxiliary voltage detection device that gives alarm sounding at a distance when approach to a live line.



### ■ Features

- Alarm sound of electronic buzzer and flashing when approaching to live line is detected.
- It is ideal for preventing human errors, as there is no power switch and it is always on stand-by.
- Flexible size adjustment is possible with Velcro.





## ■ Specifications

|   |                              |  |
|---|------------------------------|--|
| Location of use                                       |                              | Exclusive for work with overhead lines |
| Alarm starting distance<br>[Under standard condition] |                              | 80cm against 6.6kV                     |
| Frequency   |                              | Both 50Hz and 60Hz                     |
| Sound volume  |                              | 65dB or more [1m apart]                |
| Battery   |                              | CR2032 [3V] ×1pce                      |
| Battery life<br>[with new battery]                    | Continuously operating state | About 15hr.                            |
|   | Unused state                 | About 2years                           |
| Operating temperature range                           |                              | -5°C~+40°C                             |


## ■ About Field Intensity (Changing of Operation Voltage Distance)

Operation distance is varied depending on the actual surrounding environment.

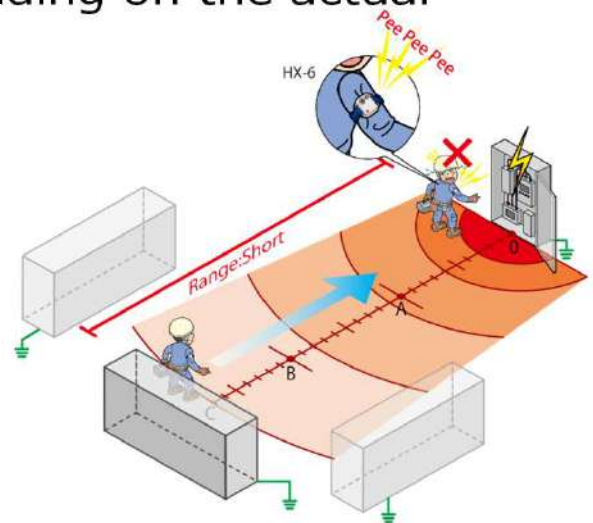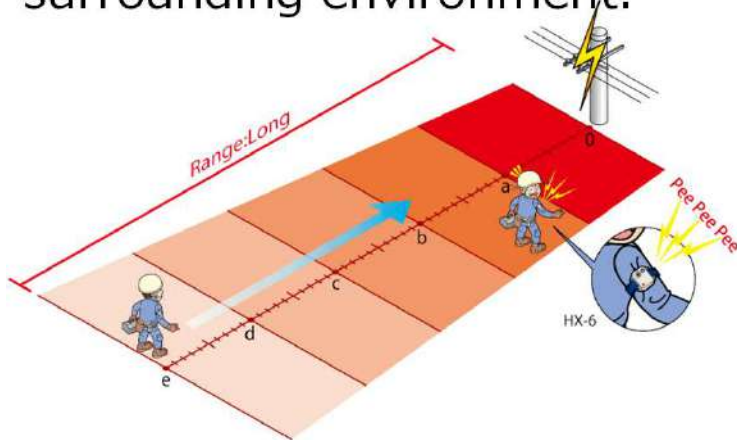

## ■ Operation Voltage-distance table and graph [HXA-6]

Operation Voltage-Distance Table and graph are theoretical value. Please confirm operation distance in actual use environment before using.

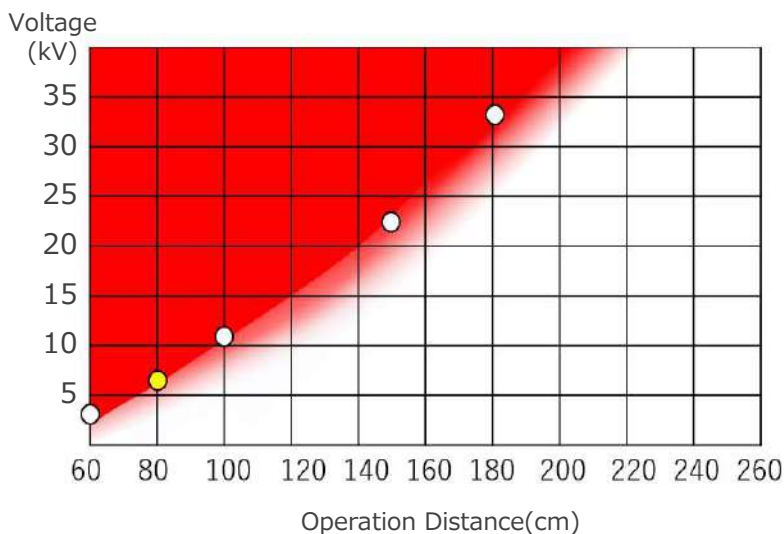

| Voltage[kV] | Operation Starting Distance |
|-------------|-----------------------------|
| 3.3         | 60                          |
| 6.6         | 80                          |
| 11          | 100                         |
| 22          | 150                         |
| 33          | 180                         |

- : Operation Area
- : Non-Operation Area