

## Hot line proximity alarm [Wrist Alarm]

# HXW-6W type

Auxiliary voltage detection device that gives alarm sounding at a distance when approach to a live line.



### ■ Features

- Alarm sound of electronic buzzer when approaching to live line is detected.
- It is ideal for preventing human errors, as there is no power switch and it is always on stand-by.




### ■ Specifications

Working voltage range	1kV to 42kV
Standard distance for operation start	60cm against 6.6kV (3.8kV to ground ) * under Hasegawa's standard conditions.
Frequency	Both 50Hz and 60Hz
Sound volume	65dB or more ( 60cm apart )
Battery	Coin type Lithium battery (CR1620) 1 piece
Operating temperature range	-10℃~+40℃
Dimensions	(W) 77mm×(D) 40mm×(T) 14mm
Weight	About 35g

# ■ About Field Intensity (Changing of Operation Voltage Distance)

Operation distance is varied depending on the actual surrounding environment.

Operation Voltage-Distance against Hot Line " \*\* kv "

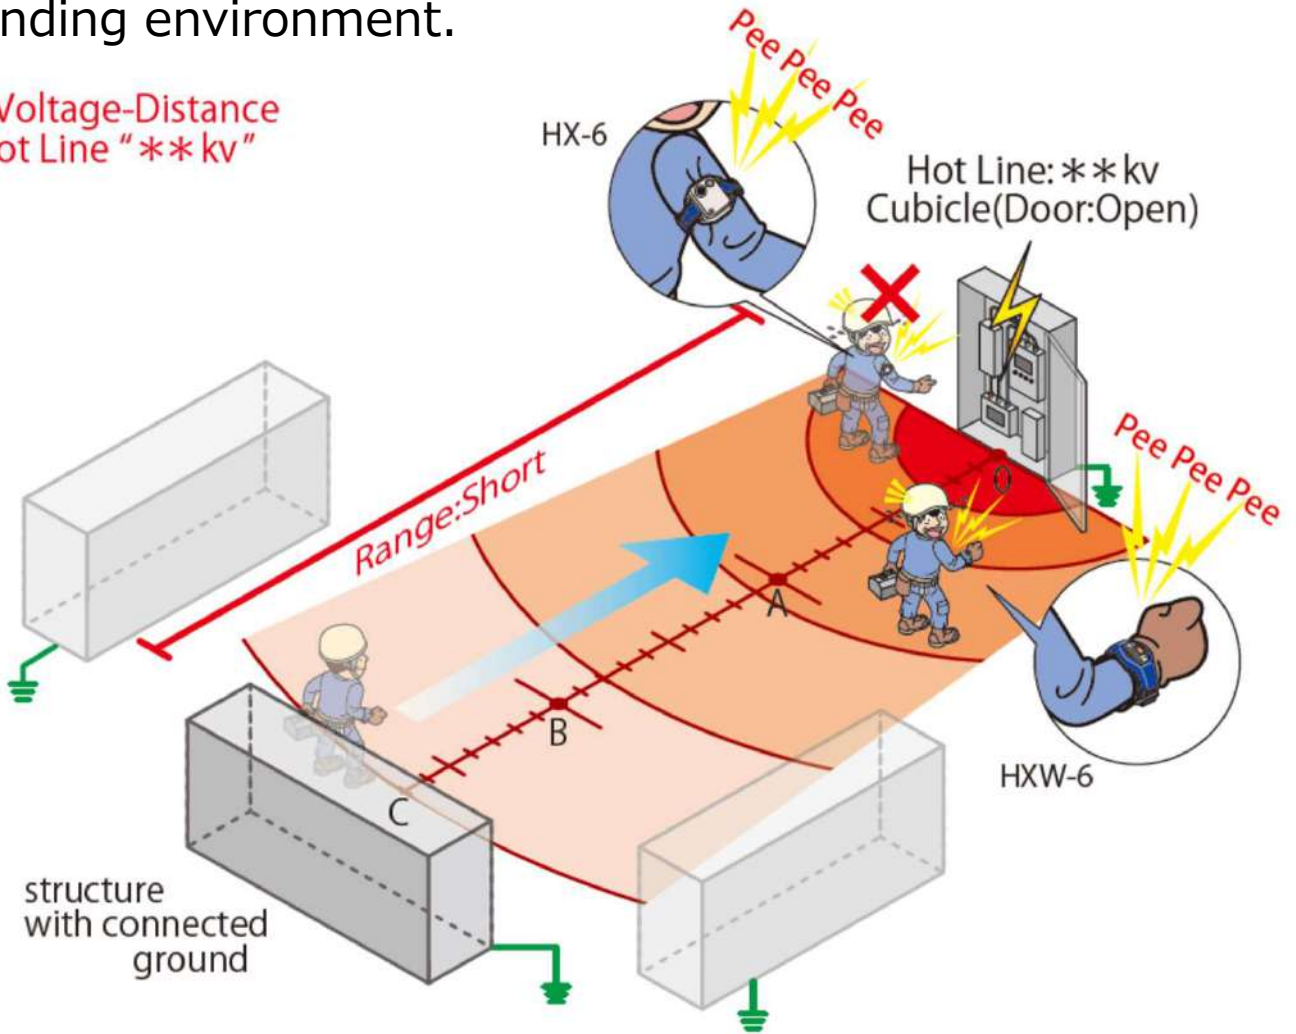

Operation Voltage-Distance Table and graph are theoretical value. Please confirm operation distance in actual use environment before using.

